

Split Screen Divider Installation





SPLIT SCREEN DIVIDER INSTALLATION - TXT







What You Will Need:

Scuff pads (supplied)

Acetone

Primer (supplied)

Gloves

Goggles

Cleaning cloth

Foam brush (supplied)

Roller (supplied)

VERY IMPORTANT:

You must use acetone only (NO SUBSTITUTES) to clean center canopy surface.

Follow acetone and primer manufacturer's safety instructions regarding personal protective gear.

Work in a well ventilated area.



SPLIT SCREEN DIVIDER INSTALLATION - TXT



Installation Overview:

INSTALL THE CANOPY CHANNELS (x2)*:

- 1. Scuff the installation area
- 2. Clean the installation area with acetone
- 3. Apply the primer to the area
- 4. Remove the adhesive backing
- 5. Apply channels to the canopy
- 6. Apply pressure with the roller

INSTALL THE DIVIDER:

- 7. Remove the protective paper
- 8. Slide the divider into the channels

INSTALL THE D-RINGS (x3):

- 9. Clean the installation area with acetone
- 10. Apply the primer to the area
- 11. Remove the adhesive backing
- 12. Apply the D-ring to the installation area

FINISH THE INSTALLATION:

13. Fasten cords to D-rings (x3)

^{*} After installation let set at least overnight






ClubPro.com 800 467 2844





There are two channels to install under the canopy

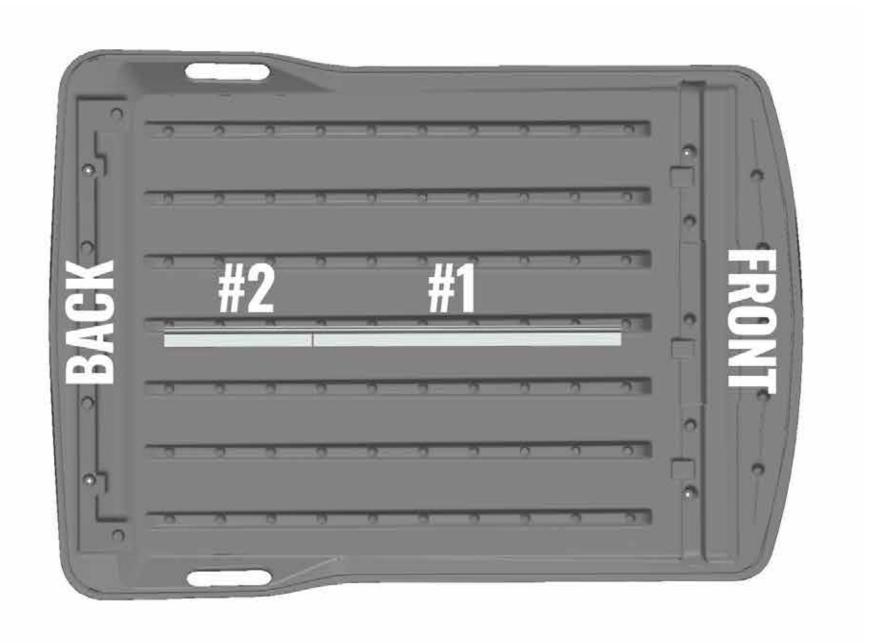





Scuff the installation area with Scotch Brite 7747







Clean the installation area with acetone and cloth




Follow the acetone manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





Apply primer to the installation area with brush

Let set for a minimum of 5 minutes

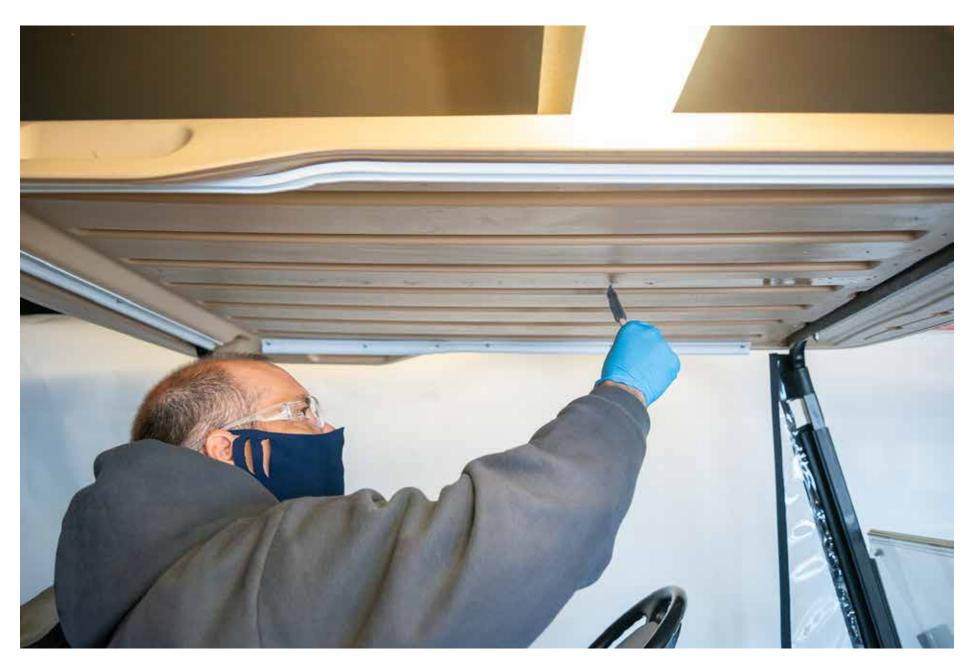

Follow the primer manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.






A. Remove adhesive backing from the channels (x2)








5.1 Apply channel #1 to the canopy

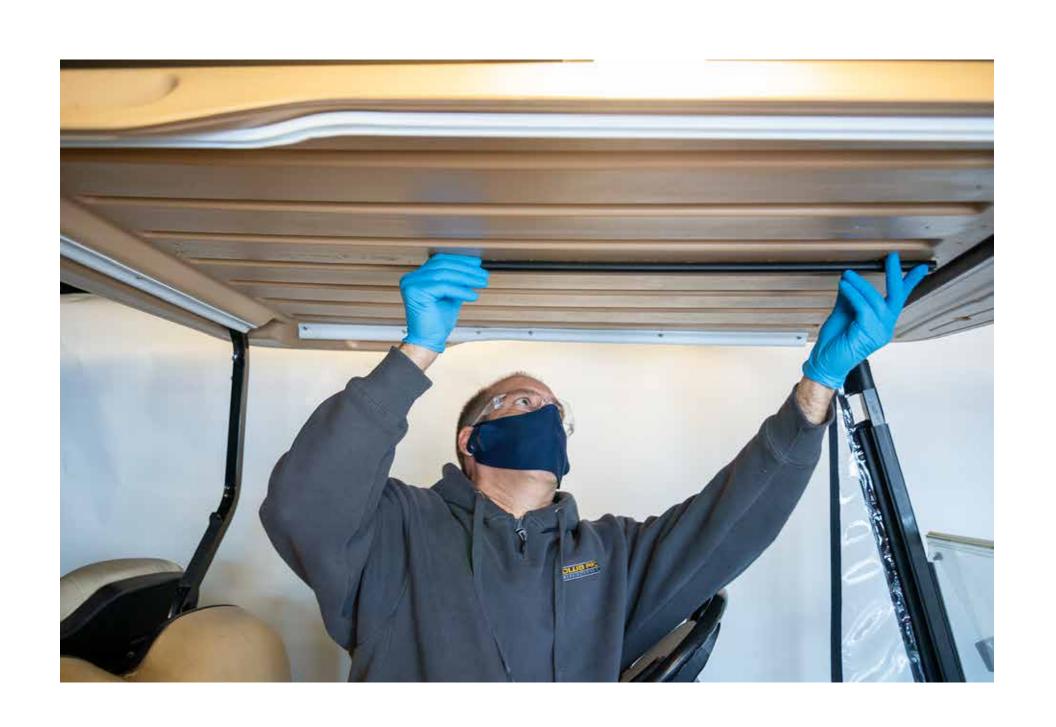





5.2 Apply channel #2 to the canopy

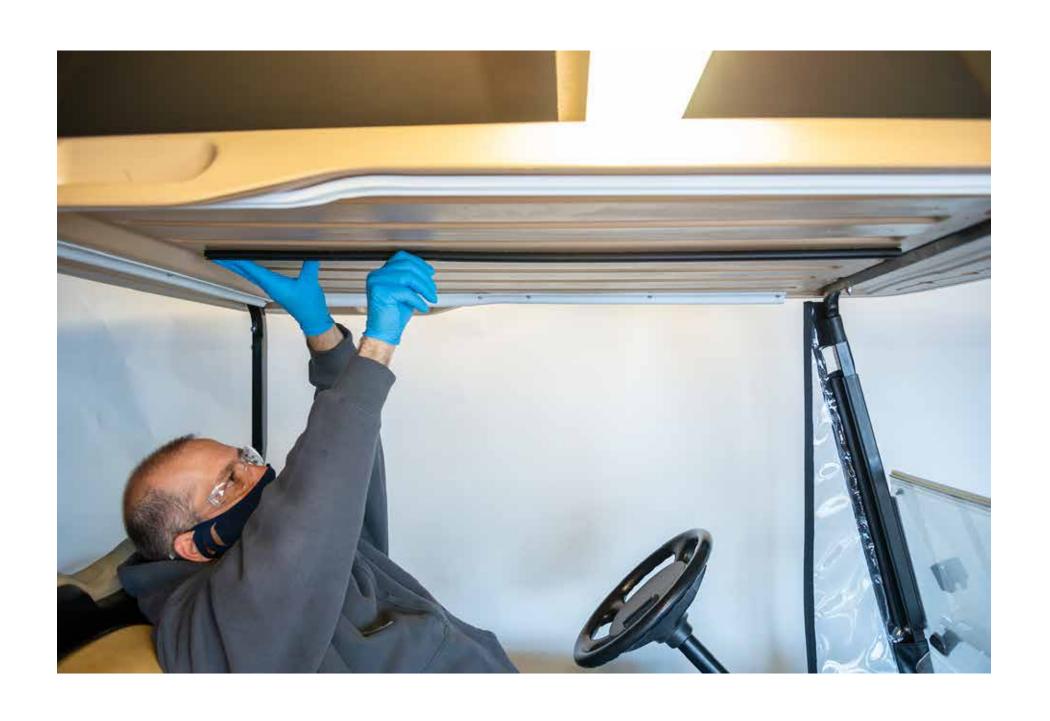






Apply pressure with roller (x2)

Let set at a minimum overnight; the manufacturer suggests 24 hours

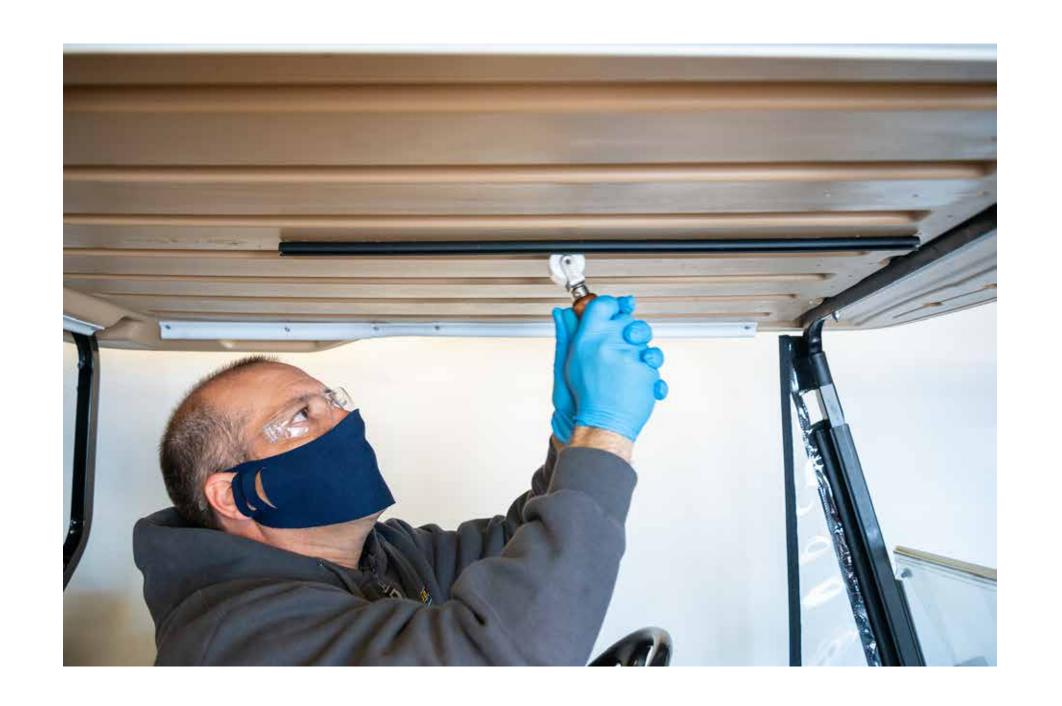



Install the Divider





Install the Divider:

Remove protective paper from the divider








Install the Divider:

Slide the divider into the channels

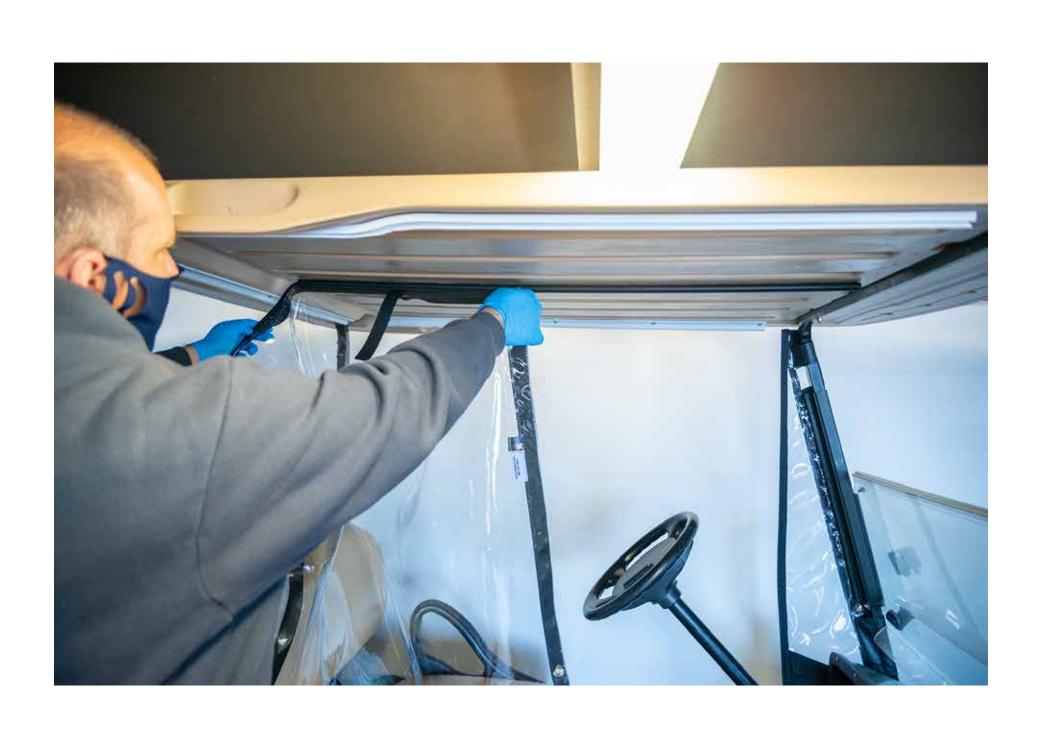







9.1 Clean the top of front body panel with acetone and cloth



Follow the acetone manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





Apply primer to the installation area with brush

Let set for a minimum of 5 minutes




Follow the primer manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





11.1 Remove adhesive backing from the D-ring

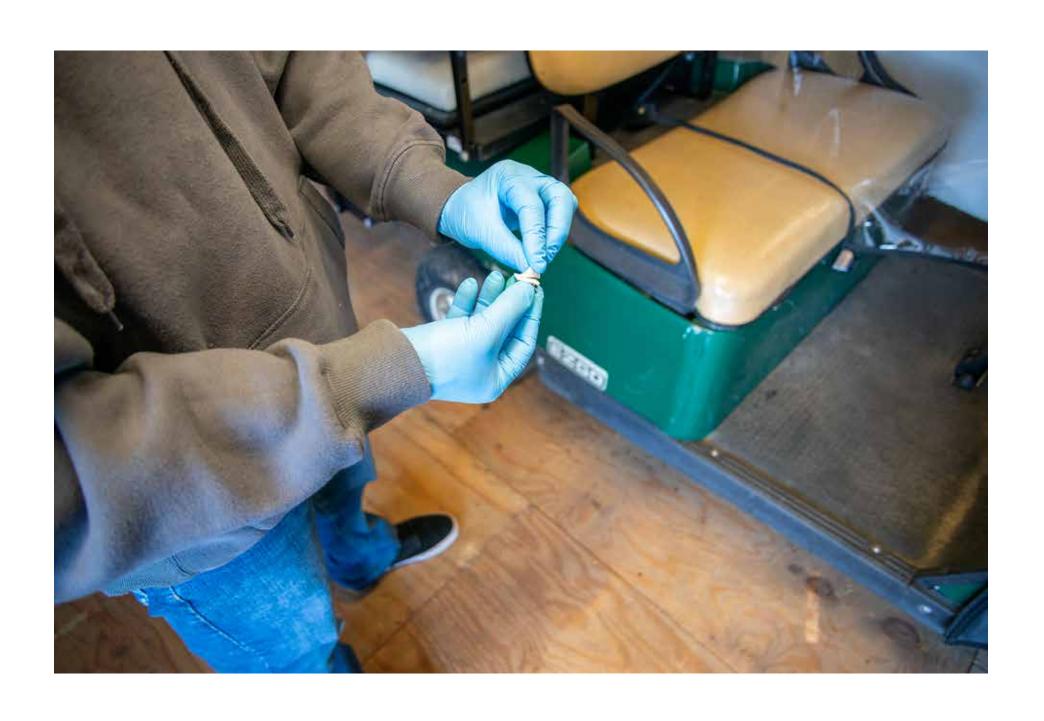





Apply D-ring to the top of front body panel

Let set for a minimum of 15 minutes










Glean the bottom of front console with acetone and cloth

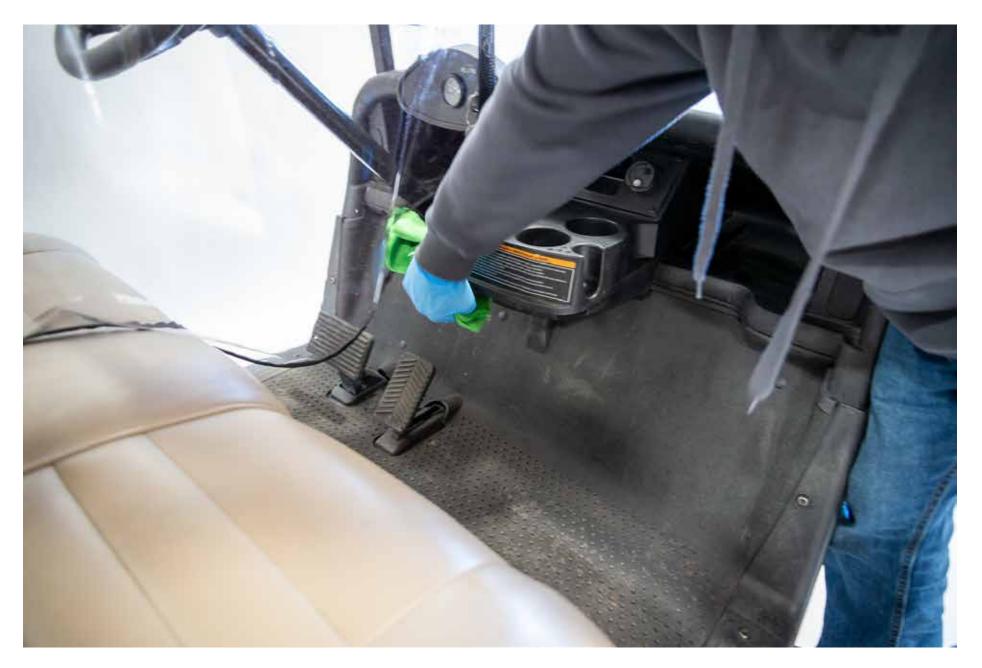

Follow the acetone manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





Apply primer to the installation area with brush

Let set for a minimum of 5 minutes




Follow the primer manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





Remove adhesive backing from the D-ring

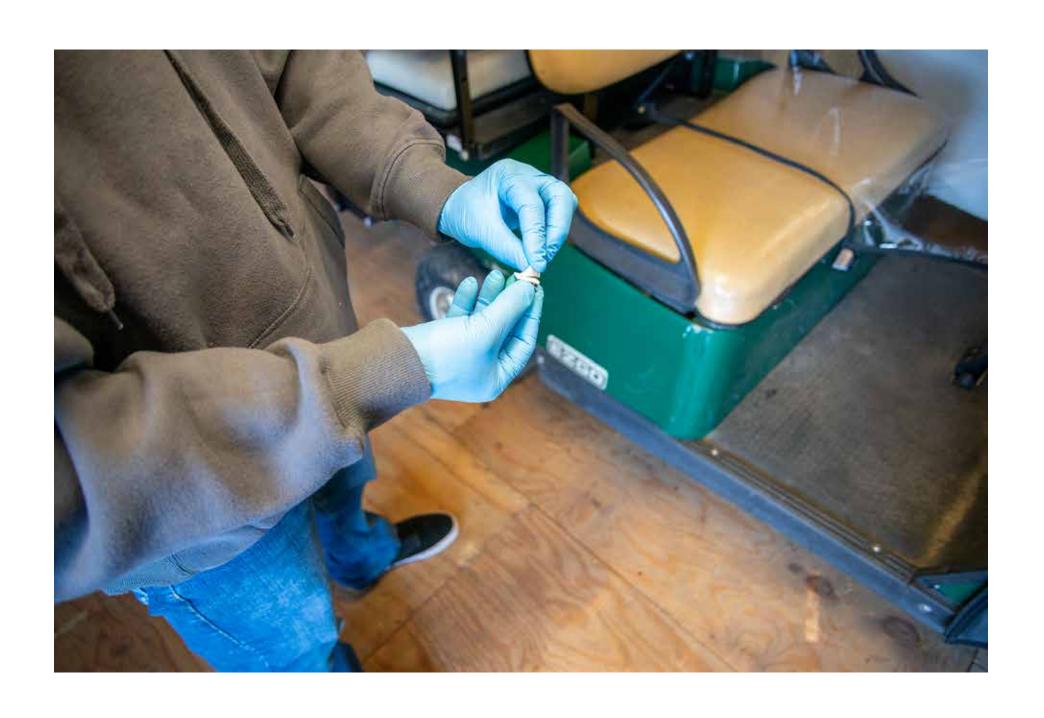





Apply D-ring to the bottom of front console

Let set for a minimum of 15 minutes









9.3 Clean the panel under seat back with acetone and cloth




Follow the acetone manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





Apply primer to the installation area with brush

Let set for a minimum of 5 minutes

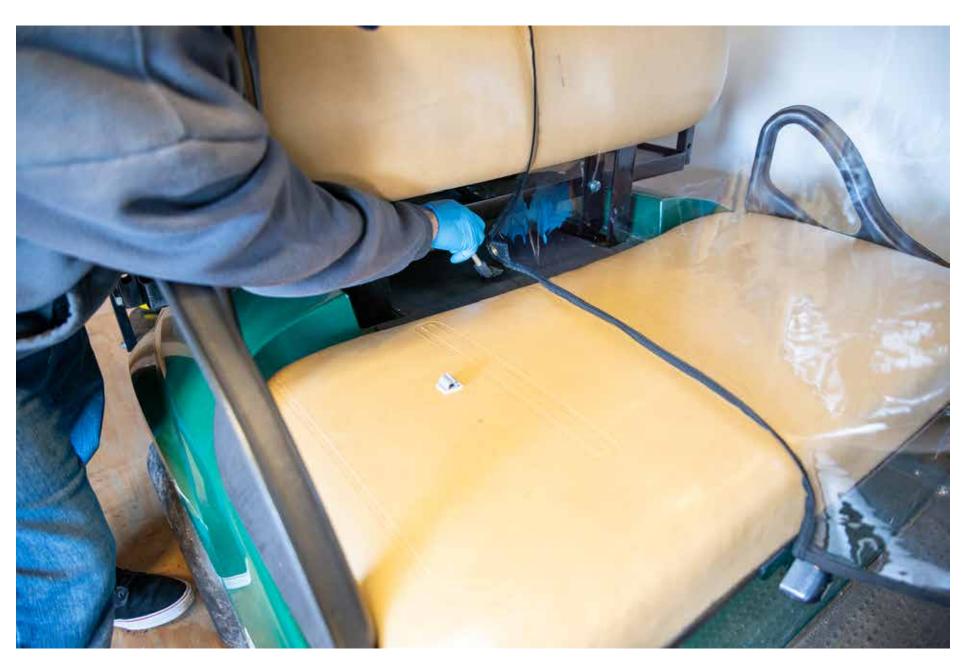


Follow the primer manufacturer's safety instructions regarding personal protective gear. Work in a well ventilated area.





Remove adhesive backing from the D-ring

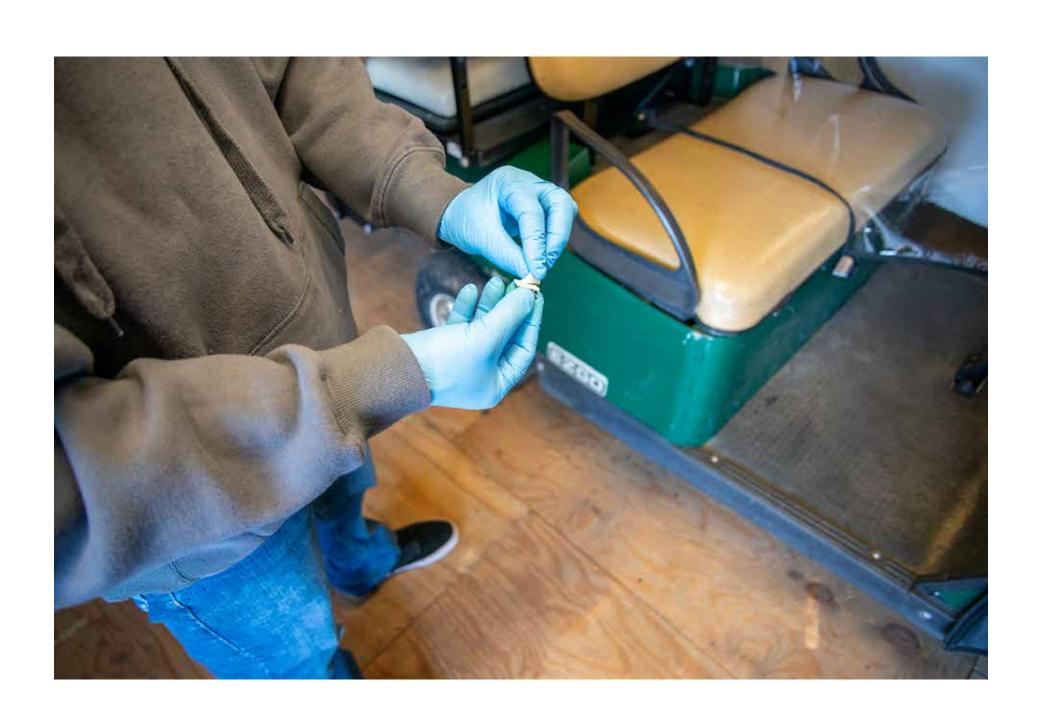






Apply D-ring to the panel under seat back

Let set for a minimum of 15 minutes

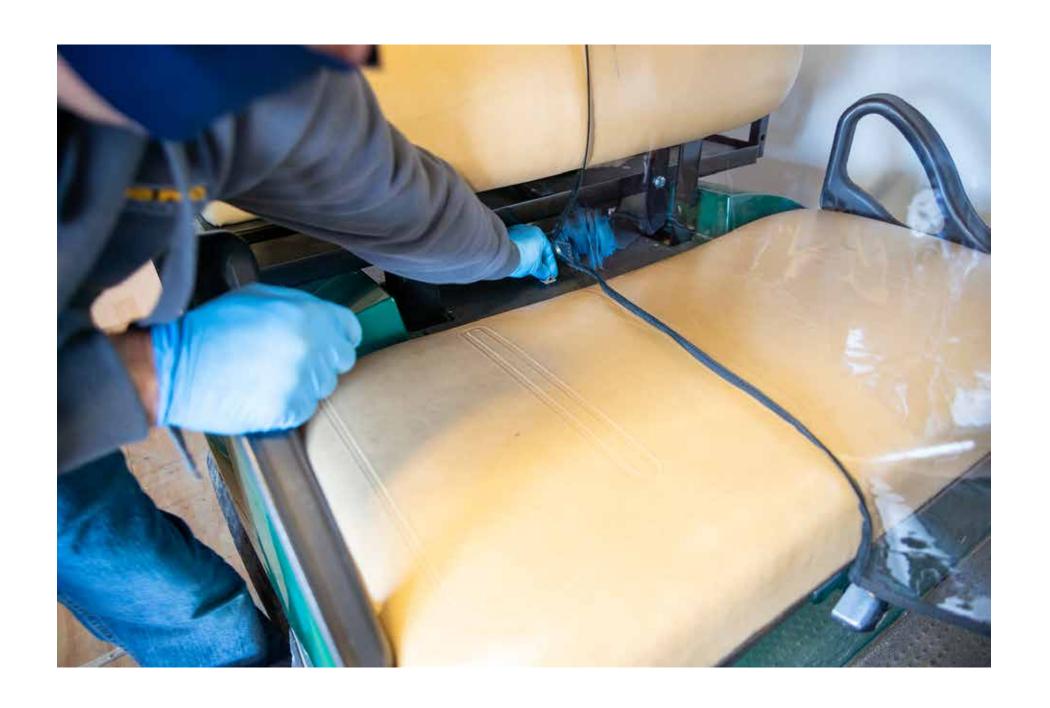



Finish the Installation





Finish the Installation:

Fasten the mini bungee cord to D-ring #1








Finish the Installation:

Fasten the mini bungee cord to D-ring #2

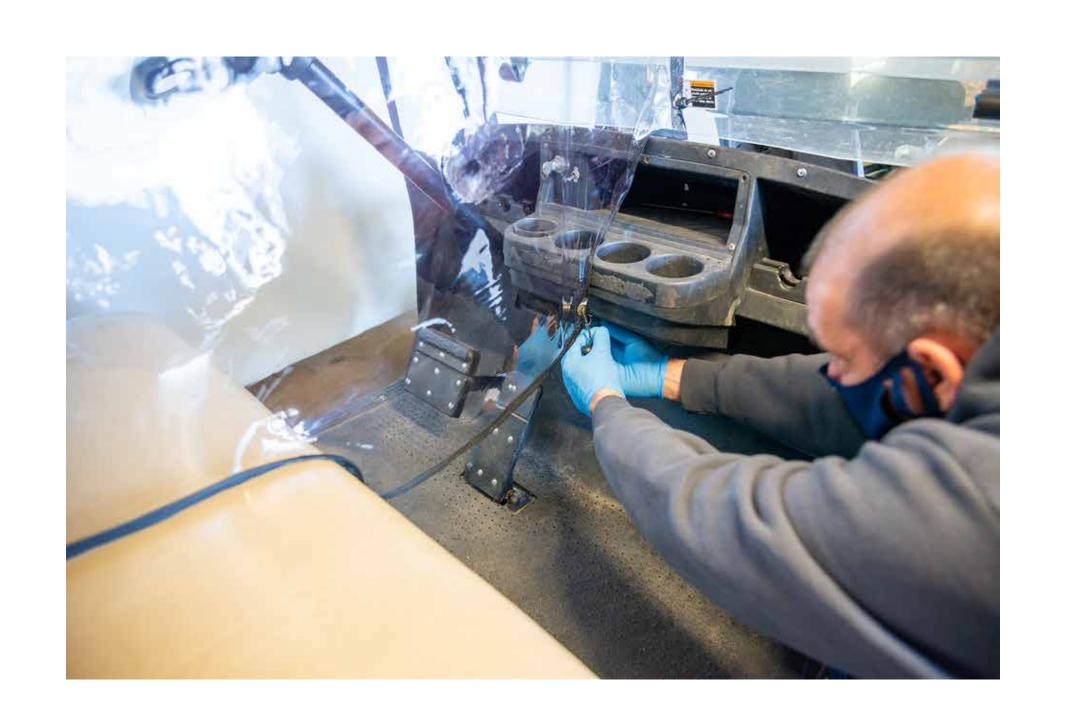






Finish the Installation:


Fasten the mini bungee cord to D-ring #3

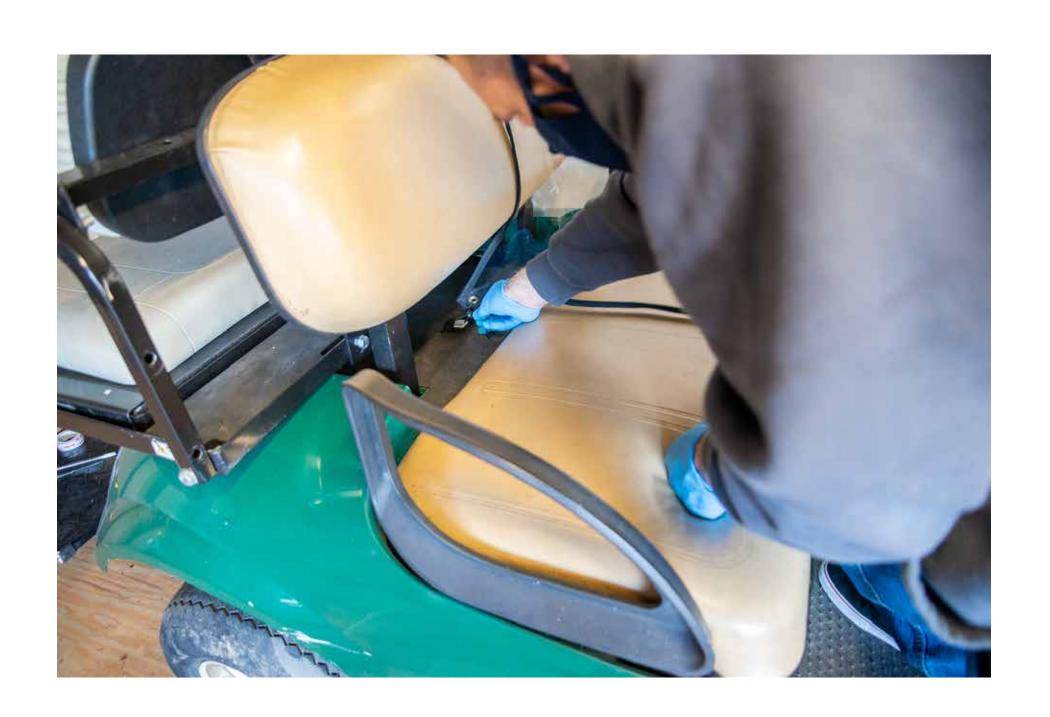



SPLIT SCREEN DIVIDER INSTALLATION - TXT



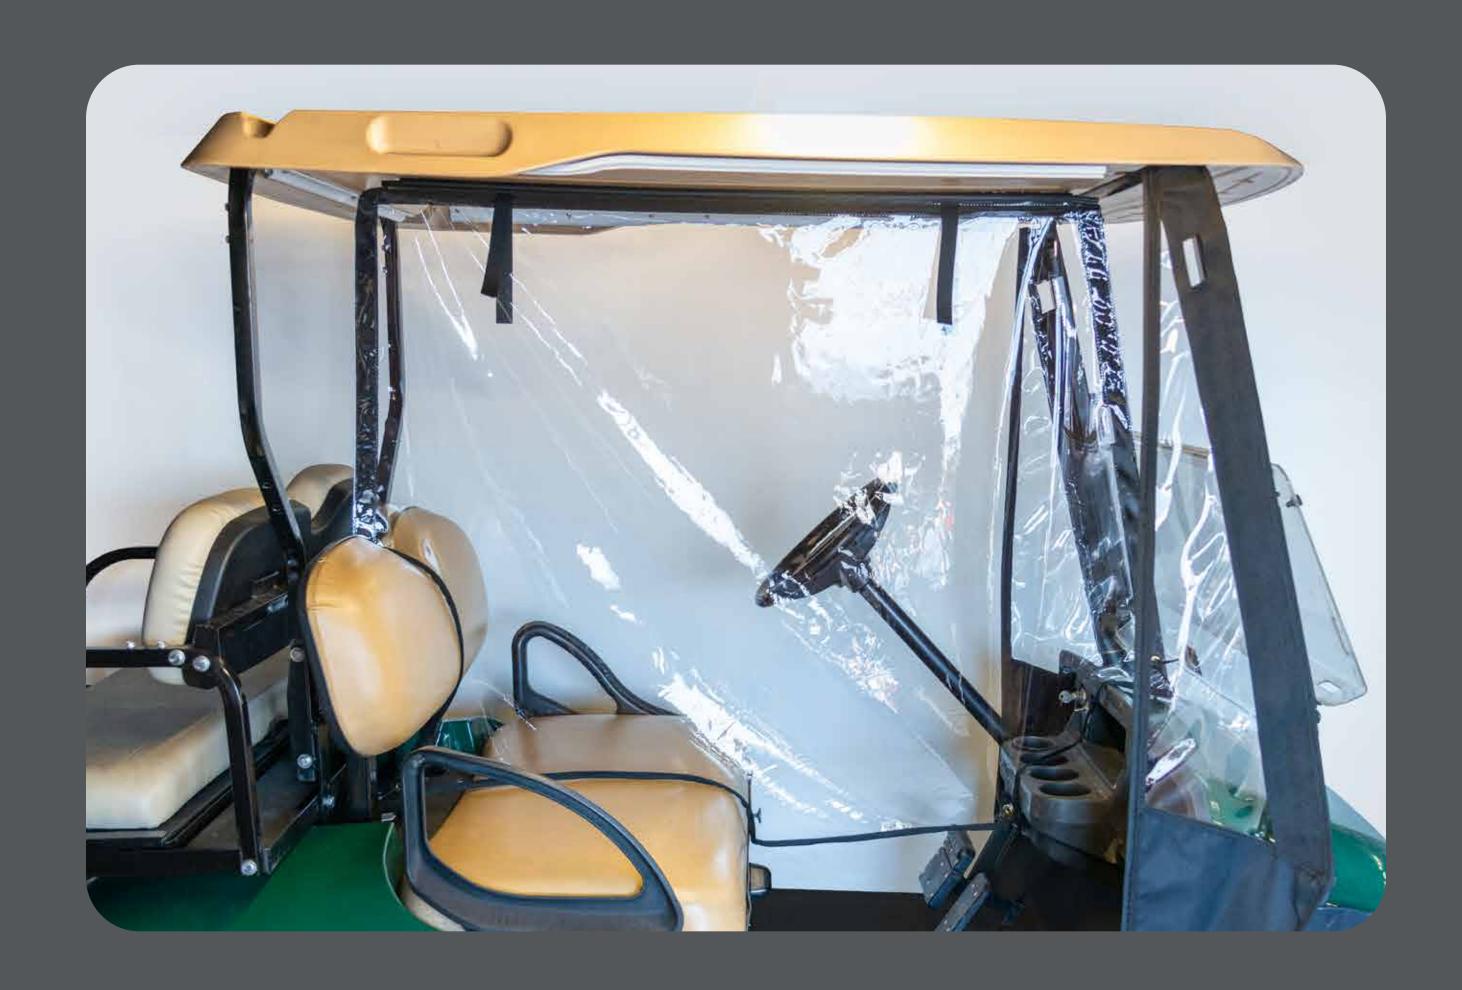





Cleaning/Disinfecting:

We recommend using a professional vinyl cleaner with no alcohol.

Follow the initial step with a soap and water solution as you would normally clean the golf cart.

Note: The vinyl cannot be cleaned with an alcohol based disinfectant.

Do not store vinyl when wet.



Warranty:

We will guarantee workmanship and material for 1 year (assuming installation and cleaning procedures are followed).

If you have any questions do not hesitate to contact us.



STAY SAFE AND ENJOY!



800 467 2844 Info@ClubPro.com ClubPro.com

AUGUSTA, GA | DEER PARK, NY | LOUISVILLE, KY | SANTIAGO, D.R.

Produced by: RomeoCo.com EdgeMediaDigital.com